



AFFORDABLE. EASY TO USE. GREEN CHOICE.

Space-saving & affordable • The PlateWriter™ Infuse is an affordable, metal Computer-to-Plate system which produces press-ready aluminium plates for small to mid-size commercial print applications, with daylight operation and without the use of chemical processing. This small foot-print CtP solution is completely self-contained and its chemical-free approach means no additional equipment (such as chemical processors or washout units) are required.


Digital & semi-automated • High quality digital CtP plates with accurate registration are guarenteed with the PlateWriter™ Infuse. Its semi-automated plate registration system provides a versatile plate handling approach, so multiple plate sizes and gauges can be used interchangably. This makes the Glunz & Jensen PlateWriter™ Infuse suitable for both commercial printers and smaller newspaper printers with one or more printing presses.

A water-based Liquid Dot™ image is applied to non-photosensitive aluminium printing plates. The imaged plates are manually fed through an integrated

Inkjet technology delivers plates without chemistry •

imaged plates are manually fed through an integrate finishing unit which dries the plates and bonds the Liquid Dot™ to the plate surface, making CtP plates capable of printing more than 50,000 impressions.

The sustainable choice • PlateWriter™ Infuse has the lowest energy usage in its class and it eliminates water usage, chemicals and disposal costs. In fact, you can now refurbish your old PlateWriter to a new PlateWriter™ Infuse with an Infuse-kit – renew your PlateWriter and reduce waste!



PlateWriter™ Infuse

A fusion of proven function, features and flexibility from earlier PlateWriter™ models, reimagined with modular functionality. Suitable for commercial printers, small and medium newspapers, and some book printing. Compatible with 2-up and 4-up press formats up to 915 x 1140 mm.



Infuse-kit

Infuse your current iCtP™ machine with new life!
Upgrade any PlateWriter™
2000/2400/3000 or
NewsWriter™ model to a
PlateWriter Infuse in one day
– renew your prepress and reduce waste. Simply move your current computer and finishing unit to the readybuilt Infuse-kit and you are ready to go!








The imaged plates are manually fed through the integrated finishing unit which dries the plates and bonds the liquid dots to the plate surface.

Simple, clean operation with no mess and no fuss. Advanced inkjet technology means you only handle cartridges.





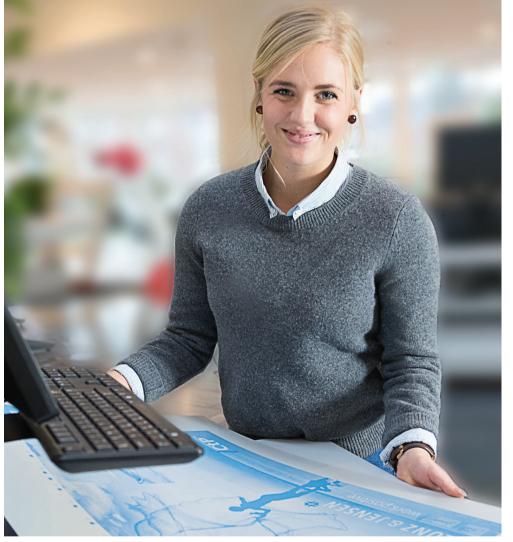


Inkjet technology is used to apply a Liquid Dot™ image to non-photosensitive, conventionally grained aluminium plates.

Use the manual or semi-automated plate loading mechanism with optical sensors to deliver digitally accurate plates.









The PlateWriter™ delivers standard metal plates for your press which requires no pressroom changes.

Supplied with an industry standard Harlequin-based Xitron RIP on a powerful PC platform ready to accept jobs from Mac or PC.





iCtP™ CONSUMABLES

iCtP™ consumables are designed to work together to create the sharpest and most robust image possible when using inkiet technology to make offset printing plates.

Liquid Dot is a patented, specially fomulated liquid oleophilic coating, which is applied directly onto the iPlate, creating a high definition image.



iPlates[™] are specially designed, conventionally grained aluminum plates with no thermal or light sensitive coatings. They are available in both standard and custom size and in gauges from 0.15-0.30 mm.

i-Finisher protects the background of your plates. It is designed for use with the iCtP™ automated finising unit after imaging and can also be applied manually for protection of plates during storage.



iPlate Cleaner is a





Deletion pens allow you to make small corrections and remove minor flaws on your imaged plates, without having to re-image a new plate, saving you time and ressources.









Stay updated! Follow Glunz & Jensen





		PlateWriter™ Infuse
MODEL		Professional quality – Low price point
IMAGING		
Market position		Small to medium commercial printers; 2-up and 4-up
Imaging technology		10 x 360 Ultra high definition imaging array (3600 dual density nozzles delivering up to 2880dpi)
Imaging resolution		1440 x 1440dpi or 2880 x 2880dpi
Screening		AM
Imaging fluid		Water-based Liquid Dot™ technology
Plate thickness		0.15-0.3 mm (0.006-0.012")
Plate types		Standard aluminium iPlates
Plate width		210-650mm (8.3-25.5")
Plate length		311-914mm (9.5-36")
Max imaging size (W x L)		909 x 633mm (35.8 x 24.9")
Plate registration		Professional pin bar register with optical plate loading or manual loading lever, depending on options
Imaging speed (by plate size)	400 x 511mm / 15.7 x 20.1" 550 x 650mm / 21.7 x 25.6" 605 x 745mm / 23.8 x 29.3"	2.53-5.46min/plate (Quality dependent) 5.10-10.20min/plate (Quality dependent) 6.05-12.10min/plate (Quality dependent)
GREEN CREDENTIALS		
Water consumption		None required
Power consumption (stand-by)		0.06kW (200BTU/hour)
Power consumption (average)		1.1kW (3,870BTU/hour) based on 500 plates/month
GENERAL		
Dimensions (LxWxH)		3131 x 960 x 1498mm (123.3 x 37.8 x 59")
Weight		310kg (683lbs)

Note: Specifications are subject to changes without prior notice.

Glunz & Jensen (Headquarters) Lindholm Havnevej 29 5800 Nyborg, Denmark +45 5768 8181 gj@glunz-jensen.com

Glunz & Jensen (Americas) 2185 Hwy. 292 Inman, SC 29349, USA +1 864 568 4638 gj-americas@glunz-jensen.com

